



## Value, Quality and Experience



R 104/A

Single layer, square field, manual collimation system with a lightweight and compact design intended for installation on mobile X-ray equipment.


This device has been designed and manufactured for skeletal investigations and ER applications.

## This model includes the following standard features:

- Maximum Radiation Leakage: I50 kVp 4 mA
- Single Layer Square Field: 0x0 cm to 43x43 cm at 100 cm SID
- Minimum Inherent Filtration: 2 mm Al equivalent
- White LED
- Dimensions: 271x223x140 mm
- Weight: 4.2 Kg
- 2 Pairs of Shutters
- Accessory Guide Rails
- Color Customizations and Many Other Personalization Options Available

## R 104/A

TECHNICAL FEATURES			
Application	Mobile X-Ray Equipment		
Mode of Operation	Manual		
Power Supply	24 V AC/DC - 2 A		
cCSAUs and DHHS Certificat	DHHS Certification		×
	Standard: 80 mm		
Mounting Plane	Customized		+
Leakage Radiation	125 kVp - 4 mA		×
	150 kVp - 4 mA		✓
Field Type	Square Field	With Potentiometer	+
		Without Potentiometer	<b>√</b>
	Round Field	Without Fotentionneter	×
Minimum Inherent Filtration	2 mm Al equivalent		<b>√</b>
	1 mm Al equivalent		+
	Cutomized		+
Additional Variable Filtration	Manual		+
	Motorized		×
Light Source	LED		✓
	Halogen Lamp		+
	No Light		×
SID Measurement	Electronic		×
	Retractable Tape Measure		✓
Image Receptor Alignment	Centering Light		×
	Single Laser	Class I	+
		Class II	+
	Double Laser	Class I	×
		Class II	×
Flanges and Spacers	Iron mounting flange spacers: 1.5 thickness		+
	Fixed	Metal	✓
		Resin	×
	Rotating	Metal	+
	-	Resin	+
Collimator Mounting Method	Manual Alignment with Metal Flange		✓
	Automatic Centering with Metal Flange		+
	Automatic Centering with Resin Flange		+
	Customized Attachment		+
User Interface	CAN-Bus		×
	CAN-Open		X
Patient Monitoring Camera			×
Proxitmity Sensor			×

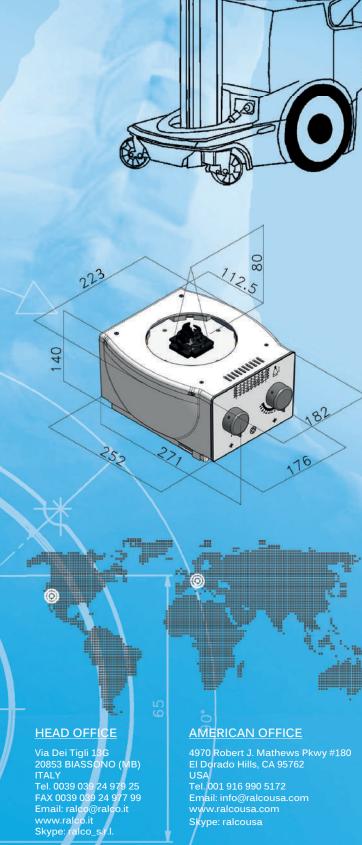

Tel. 001 916 990 5172 Email: info@ralcousa.com www.ralcousa.com

Skype: ralcousa

CUSTOM MODELS ON REQUEST

◆ Optional

× Not Available

DR R 104/A Rev. A - ACD/012/21

√ Standard